


## MTX44V2\_VW Videowall Matriz HDMI 4x4 Videowall

La matriz 18Gbps 4x4 con cambio inmediato de señal permite conectar cualquiera de sus cuatro fuentes HDMI con cualquiera de sus cuatro salidas HDMI. Tiene función videowall y PIP9. Resolución máxima soportada 4K60 4:4:4. Las entradas y salidas IR seguirán los enrutamientos HDMI. Capacidad para embeber y desembeber el audio. Soporta varias señales en pantalla al mismo tiempo. La matriz se puede controlar mediante el panel frontal, RS232, Ethernet e interface gráfico accesible por LAN.

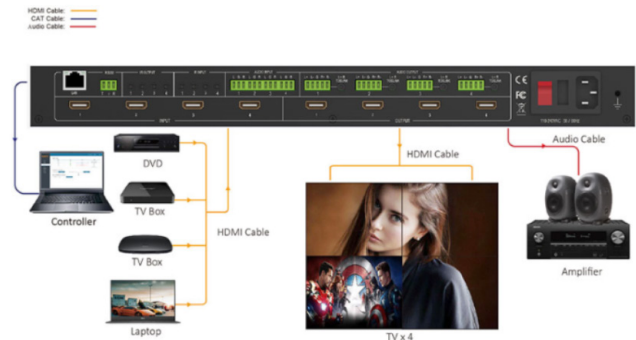

### CARACTERÍSTICAS:

- HDMI 2.0 and HDCP 2.2 compliant
- Support 18 Gbps video bandwidth
- Support video resolution up to 4K60 4:4:4
- Color space: RGB, YCbCr 4:4:4, YCbCr 4:2:2
- Support seamless switching, video wall function
- Support CEC management
- Support audio matrix and IR matrix function
- Support external L/R audio insert on HDMI stream
- Support EDID management
- Support front panel, RS232, TCP/IP (LAN 10M/100M) control

Technical	
HDMI Compliance	HDMI 2.0
HDCP Compliance	HDCP 2.2
Video Bandwidth	18Gbps
Video Resolution	Up to 4K60 4:4:4
Color Space	RGB, YCbCr 4:4:4/4:2:2
HDMI Amplitude	T.M.D.S +/- 0.4Vpp
Differential Impedance	100±15ohm
ESD Protection	Human-body Model: ±8kV (Air-gap discharge) , ±4kV (Contact discharge)
RS232/Ethernet Control	
Baud rate and Protocol	Baud rate: 9600, data bit: 8 Stop bit: 1, no parity checking
Ethernet	IE10.0+,HTML5
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	430mm (W)×220mm (D)×44mm (H)
Weight	5Kg
Power Supply	AC 110 - 240V
Power Consumption	60W (Max)
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 70°C / -4°F ~ 158°F
Relative Humidity	10%~50% RH (non-condensing)