


XTN150RS232 Splitter Extensor HDMI

Este splitter HDMI puede extender la señal HDMI de una entrada por cable cat6a de 18Gbps HDMI hasta 120 metros 4K2K@60Hz 4:4:4/ 150M Full HD por cada una de sus cuatro salidas. Dispone de salida local HDMI en el transmisor, así como salida de audio analógica y digital desembebidas.

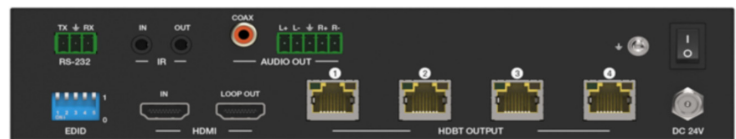

CARACTERÍSTICAS:

- HDMI 2.0b, HDCP 2.2 and HDCP 1.x
- Ancho de banda 18Gbps
- Resol, max soportada 4K2K@60Hz 4:4:4
- Soporta HDR, HDR10+, HLG y Dolby vision
- Audio 7.1CH HD
- Salidas analógica y digital de audio desembebido
- Distancia máxima de transmisión de señal 120 meters 4K2K@60Hz, 150 metros 1080P@60Hz por CAT6/6a/7
- Una salida HDMI local y cuatro extendidas CAT6.
- IR, RS-232
- EDID management.
- No es necesario alimentar los receptores.
- Montaje en rack. Adaptadores incluidos.

Technical	
HDMI Compliance	HDMI2.0
HDCP Compliance	HDCP2.2/HDCP 1.4
Video Bandwidth	18Gbps
Video Resolution	Up to 4k2k@50/60Hz 4:4:4
Color Space	RGB / YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0
Color Depth	8-bit,10-bit,12-bit(1080p@60Hz) 8-bit (4K2K@60Hz YUV4:4:4) 8-bit,10-bit,12-bit(4K2K@60Hz YCbCr 4:2:2/4:2:0)
HDR	Support HDR10, HDR10+, HLG, Dolby vision
HDMI Audio Formats	LPCM 2.0/2.1/5.1/6.1/7.1, Dolby Digital, Dolby TrueHD, Dolby Digital Plus(DD+), DTS-ES, DTS HD Master, DTS HD-HRA, DTS-X
Coaxial Audio Formats	PCM2.0, Dolby Digital / Plus, DTS 2.0/5.1
Analog Audio Formats	PCM 2.0CH
ESD Protection	Human body model—±8kV (Air-gap discharge) & ±4kV (Contact discharge)
Connection	
Input	1×HDMI Type A (19-pin female)
Out put	1×HDMI Type A (19-pin female) 4x CAT OUT [RJ45, 8-pin female] 1x Coaxial Audio OUT [RCA] 1x L/R Audio OUT [3.5mm Stereo Mini-jack]
Control	1×RS-232 (3-pin phoenix connector) 1x EDID DIP switch [5-pin] 1x IR IN [3.5mm Stereo Mini-jack] 1x IR OUT [3.5mm Stereo Mini-jack]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	Transmitter: 220mm (W) × 130mm (D) × 40mm (H) Receiver: 140mm (W) × 65mm (D) × 18mm (H)
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 24V/1A (Locking connector)
Weight	Transmitter: 853g Receiver: 246g
Power Consumption	35W
Operating Temperature	32 - 104°F / 0 - 40°C
Storage Temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)
Resolution / Distance → 120 meters resolution 4K2K@60Hz, 150 meters at 1080P@60Hz via a single CAT6/6a/7 cable	